



**HAVE A SPECIAL APPLICATION?**

Specialty ties from Avery Dennison are ideal for securing harnesses (screw mounts and push mounts), prototyping (releasables), harnessing two bundles simultaneously (double headed), and for identification purposes (ID ties).

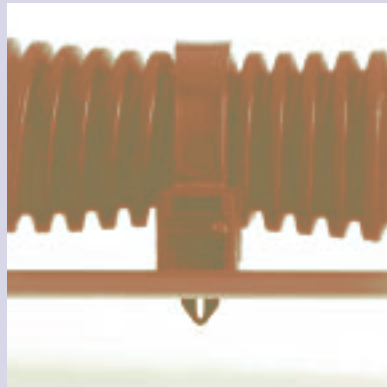


**ONE STEP FASTENING... Push-Mount cable ties**  
 from Avery Dennison. Simply push into a pre-drilled hole for a simple and secure one piece harness. Winged Push-Mount ties are for variable panel thicknesses up to 1/8" (3.175mm) and a hole diameter of 1/4" (6.35mm).




Length: 7.5"/190.5mm, width: .177"/4.50mm, thickness: .050"/1.27mm

7.5" (190.5 mm)		PUSH-MOUNT				
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
08414	NATURAL PUSH MOUNT	7.5"/190.5mm	1/16"-1-3/4"/1.59mm-44.45mm	50 LBS./22.68kg	1000/BAG	5M
08439	NATURAL PUSH MOUNT				100/BAG	5M
08445	BLACK/HS/PUSH MOUNT				1000/BAG	5M
08446	BLACK/WR/PUSH MOUNT				1000/BAG	5M



Length: 11"/279.4mm, width: .177"/4.50mm, thickness: .050"/1.27mm

11" (279.4 mm)		PUSH-MOUNT				
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
10355	NATURAL PUSH MOUNT	11"/279.4mm	1/16"-3"/1.59mm-76.2mm	50 LBS./22.68kg	1000/BAG	5M
10359	BLACK/WR/PUSH MOUNT				100/BAG	1M



Length: 4"/101.6mm, width: .095"/2.41mm, thickness: .039"/.99mm

4" (101.6 mm)		WINGED PUSH-MOUNT				
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
10690	NATURAL WINGED PUSH MOUNT	4"/101.6mm	1/16"-7/8"/1.59mm-22.23mm	18 LBS./8.16kg	1000/BAG	5M
10691	BLACK/HS/WINGED PUSH MOUNT				1000/BAG	5M

