





3/16 (4.76) HEX FEMALE SCREW LOCKS

(male thread lock)

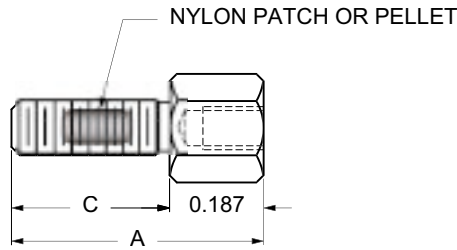

NYLON PATCH LOCK

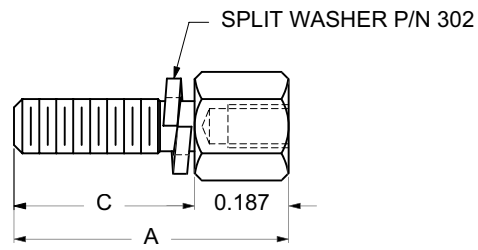

PREASSEMBLED LOCK WASHER

ORDERING CODE	XX	XXXX	XX	MATERIAL	CODE
	MATERIAL	BASIC PART NUMBER	FINISH		
				BRASS	BR

NYLON PATCH LOCK			PREASSEMBLED LOCK WASHERS		C		
3/16 (4.76) HEX			5mm HEX	SPLIT LOCK	EXT TOOTH	MALE LENGTHS	
THREADS	THREADS	THREADS	THREADS	THREADS		INCH	METRIC
4-40 UNC-2A	M3 X 0.5	M3 X 0.5	4-40 UNC-2A	4-40 UNC-2A			
9530	9540	9470P				.187	4.76
9531	9541	9471P	9551	9011		.250	6.35
9532	9542	9472P	9552	9012		.312	7.94
9533	9543	9473P	9553	9013		.375	9.52
9534	9544	9474P				.437	11.11
9535	9545	9475P				.500	12.70
9536	9546	9476P				.562	14.29
9537	9547	9477P				.625	15.87
9538	9548	9478P				.688	17.46
9539	9549	9479P				.750	19.05

Also available with preassembled square coned washers.

CODE	FINISH	CODE	FINISH
00	Plain — None	35	Zinc ASTMB633, Type I, Fe/Zn 8 — No Chromate
03	Bright Dip — Brass	36	Zinc ASTMB633, Type II, Fe/Zn 8 — Yellow Chromate
31	Cadmium QQ-P-416, CL 2 — Clear Chromate	43	Bright Tin — MIL-T-10727
32	Cadmium QQ-P-416, CL 2, Type II — Yellow Chromate	50	Black Oxide MIL-C-13924 — Steel
33	Zinc, ASTMB633, Type II, CL 3 — Black Chromate	51	Black Oxide MIL-F-495 — Brass
34	Zinc ASTMB633, Type III, Fe/Zn 8 — Clear Chromate	61	Nickel QQ-N-290 CL 1, Type VI KC
		63	Ductile, Nickel — QQ-N-290

NYLON PATCH LOCK



PREASSEMBLED LOCK WASHER



NOTES:

- Nylon locking device per ANSI IFI 124 & MIL-F-18240 specifications.
- Nylon locking device can also be applied to other male threaded products in this catalog.
- Two screw locks are required per connector
- Other combinations of body lengths (B) and male lengths (C) are available.
- *Most common material is steel with optional finish.
- A 6" lb. (female) and a 4" lb. (male) maximum assembly torque is recommended for steel screw locks.
- All dimensions are for reference only. Tolerances are to manufacturer's standards.