





# 3/16 (4.76mm) HEX FEMALE SCREW LOCKS

(slotted or washer face head)

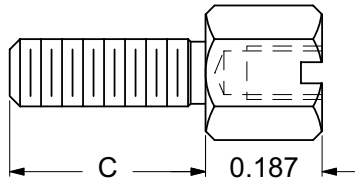

SLOTTED HEAD

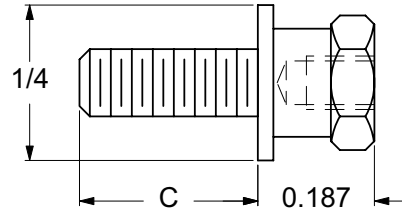

WASHER FACE HEAD


ORDERING CODE	XX	XXXX	XX
	MATERIAL	BASIC PART NUMBER	FINISH

MATERIAL	CODE
*STEEL	ST

BASIC PART NUMBERS		C	
SLOTTED HEAD	WASHER FACE HEAD	MALE LENGTHS	
MALE & FEMALE THREADS 4-40	MALE & FEMALE THREADS 4-40	INCH	METRIC
9570	9590	.187	4.76
9571	9591	.250	6.35
9572	9592	.312	7.94
9573		.375	9.52
9574		.437	11.11
9575		.500	12.7

CODE	FINISH
00	Plain—None
31	Cadmium QQ-P-416, CL2—Clear Chromate
32	Cadmium QQ-P-416, CL2, Type II—Yellow Chromate
33	Zinc, ASTM B633, Type II, CL 3—Black Chromate
34	Zinc ASTM B633, Type III, Fe/Zn 8—Clear Chromate
35	Zinc ASTM B633, Type I, Fe/Zn 8—No Chromate
36	Zinc ASTM B633, Type II, Fe/Zn 8—Yellow Chromate
43	Bright Tin—MIL-T-10727
50	Black Oxide MIL-C-13924—Steel
61	Nickel QQ-N-290 CL 1, Type VIKC
63	Ductile, Nickel—QQ-N-290

SLOTTED HEAD



WASHER FACE HEAD



**NOTES:**

1. Slot in head is on thread centerline, but may be random cut.
2. Two screw locks are required per connector
3. \*Most common material is steel with optional finish.
4. A 6'' lb. (female) and a 4'' lb. (male) maximum assembly torque is recommended for steel screw locks.
5. All dimensions are for reference only. Tolerances are to manufacturer's standards.

G9